


RG 6/U-4 Cu/CuSn TRISHIELD



Class
A+



KULLANIM ALANLARI

-Bina içi CATV, CCTV sistemlerinde dağıtım kablosu ve düşük zayıflama istenen uydu sistemlerinde bağlantı kablosu olarak kullanılır.

APPLICATION

-It is used as a distribution cable for indoor CATV, CCTV systems and as a connection cable for satellite systems where lower attenuation required.

KABLO YAPISI

1-İletken	1,02mm Ø Elektrolitik Bakır
2-Yalıtkan	4,60mm Ø Fiziksel Köpük PE
3-1.Ekran	Al-Pes Bant (100% Kapama)
4-2.Ekran	Kalaylı Bakır Örgü
5-3.Ekran	Al-Pes Bant (100% Kapama)
6-Kılıf	7mm Ø PVC Kompaund Beyaz
7-Toplam Ağırlık	49kg/km
8-Standart Uzunluk	100/500/1000/2000m


CONSTRUCTION

1-Conductor	1,02mm Ø Electrolytic Copper
2-Insulation	4,60mm Ø Physical Foam PE
3-1.Screen	Al-Pes Tape (100% Coverage)
4-2.Screen	Tinned Copper Braid
5-3.Screen	Al-Pes Tape (100% Coverage)
6-Sheath	7mm Ø PVC Compound White
7-Total Weight	49kg/km
8-Standard Length	100/500/1000/2000m

TEKNİK ÖZELLİKLER TECHNICAL CHARACTERISTICS

YALITIM DİRENCİ INSULATION RESISTANCE	EFEKTİF KAPASİTE MUTUAL CAPACITANCE	YAYILMA HIZI VELOCITY OF PROPAGATION	ÇALIŞMA VOLTAJI OPERATING VOLTAGE	TEST VOLTAJI TEST VOLTAGE	BÜKÜLME YARIÇAPI BENDING RADIUS	ÇALIŞMA SICAKLIĞI TEMPERATURE RANGE	EMPEDANS IMPEDANCE	ALEV GECİKTİRİCİLİK TESTİ FLAME RETARDANT TEST
>2000MΩxkm	53±2pF/m	82%	1,3kV	3kV	20x Cable Ø	- 40°C - +70°C	75±3Ω	IEC 60332-1-2 DIN EN 60332-1-2 EN 60332-1-2

ELEKTRİKSEL ÖZELLİKLER ELECTRICAL CHARACTERISTICS

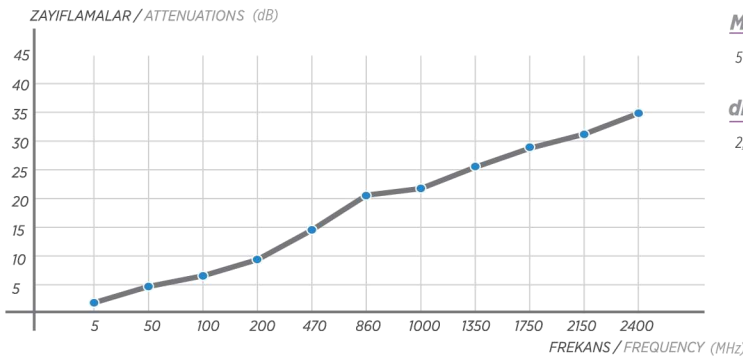

ZAYIFLAMALAR (20°C) ATTENUATIONS (20°C)

MHz

5 200 400 800 1000 2150 2400 3000

dB/100m

2,8 9,3 13,7 19,1 22 32,5 35,1 39,3